

Please type a plus sign (+) inside this box → [+]

PTO/SB/05 (4/98)

Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

## APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents.

Attorney Docket No.

7040R

First Inventor or Application Identifier

LARRY K. JOHNSON, ET AL.

Title

METHOD FOR MAKING A SEAM FOR USE IN  
DISPOSABLE ARTICLES

Express Mail Label No.

EJ814913804US

Assistant Commissioner for Patents

ADDRESS TO: Box Patent Application  
Washington, D.C. 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages [24]  
(preferred arrangement set forth below)

- Descriptive Title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 USC 113) Total Sheets [6]

4. Oath or Declaration Total pages [2]

- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 16 completed)

i. ☐ DELETION OF INVENTORS

Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
§§1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)

6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

- a. ☐ Computer Readable copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))

8. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)

9. ☐ English Translation Document (if applicable)

10. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations

11. ☐ Preliminary Amendment

12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

13. ☐ \*Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired

14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

15. ☐ Other: .....

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY  
SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS  
REQUIRED (37 C.F.R. §1.27), EXCEPT IF ONE FILED IN A PRIOR  
APPLICATION IS RELIED UPON (37 C.F.R. §1.28).

16. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in the preliminary amendment:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No. 09/034,763

Prior application information: Examiner: M. Tolin Group/Art Unit: 1733

For CONTINUATION or DIVISIONAL only: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Thomas J. Osborne, Jr.

The Procter & Gamble Company

ADDRESS

Sharon Woods Technical Center

11450 Grooms Road

CITY

Cincinnati

STATE

Ohio

ZIP CODE

45242

COUNTRY

USA

TELEPHONE

(513) 626-2238

FAX

(513) 626-3004

Name (Print/Type)

Thomas J. Osborne, Jr.

Registration No. (Attorney/Agent)

39,796

Signature

Thomas J. Osborne, Jr.

Date 12/10/99

December 10, 1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Express Mail" mailing label number EI814913804US

Date of Deposit December 10, 1999

I hereby certify that this paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to The Assistant Commissioner for Patents, Washington, D.C. 20231.

Thomas J. Osborne, Jr. 39,796  
Attorney mailing application Reg No  
  
Signature of Attorney mailing application

CASE 7040R

METHOD FOR MAKING A SEAM  
FOR USE IN DISPOSABLE ARTICLES

LARRY K. JOHNSON  
STEPHEN J. LANGE  
JOHN J. ANGSTADT  
BRADLEY E. WALSH  
FREDERICK W. GIBSON

This application is a continuation-in-part of co-pending United States Application Serial No. 09/034,763 filed on March 4, 1998.

**FIELD OF THE INVENTION**

The present invention relates to a method for making seams especially preferred for use in disposable, pant-like articles having at least one fixed side comprising a flangeless seam. Examples of such disposable articles include training pants, pull-on diapers or adult incontinence articles, disposable underwear for children (e.g., toddlers) or adults, and disposable panties which may be used with catamenial devices such as tampons or sanitary napkins.

### **BACKGROUND OF THE INVENTION**

Infants and other incontinent individuals wear disposable absorbent articles to receive and contain urine and other bodily exudates. Absorbent articles having fixed sides have been popular for use in adult incontinence articles and children's toilet-training articles because it is desirable to have an absorbent article which is very garment-like in appearance and feel. (As used herein, "articles having fixed sides" refer to disposable articles such as adult incontinence briefs and training pants which are provided to the consumer in a pant-like configuration. Thus, the articles generally have the front and rear portions joined together to form a waist hoop and leg holes. This is unlike conventional  
10   diapers which are provided to the consumer with the front and rear portions unjoined.) For adults, the garment-like appearance and feel can help reduce any embarrassment associated with the use of incontinence articles. For children, especially in their toilet training stage, the garment-like feel and appearance can help the child distinguish the article, such as training pants, from a diaper and can help the child adjust to cloth  
15   undergarments.

One example of a commercially available disposable training pant is disclosed in U.S. Patent 5,246,433 entitled "Elasticized Disposable Training Pant and Method of Making the Same", issued to Hasse et al. on September 21, 1993. Although this training pant has been a commercial success, it still suffers because it includes seams joining the  
20   front and rear portions which are not garment-like in appearance. Such seams are often constructed by positioning the lateral edges of the front and rear portions of the article in a face-to-face relationship with one another and then gluing, sewing, heat sealing, pressure bonding or ultrasonically sealing the edges to form flanges or fin seams. The flanges or fins are unsightly if located on the outwardly facing surface of the article or irritating to  
25   the wearer if located on the inward surface. Thus, attempts have been made to reduce the outwardly or inwardly extending portions of the flanges or fin seams. However, in so doing the process for making the seams generally becomes more complex and costly and may reduce the strength of the bond.

Thus, it would be advantageous to be able to provide a flangeless seam that can be  
30   constructed economically. It would also be advantageous to provide a flangeless seam

that could be produces on machinery that is very similar to that already in place. Further, it would be advantageous to reduce the amount of material that is needed to produce an aesthetically pleasing seam that is strong enough to hold together the front and rear portions of a disposable absorbent article.

5

### **SUMMARY OF THE INVENTION**

The method of then present invention provides a solution to the problems of the prior art by providing an inexpensive means to manufacture seams. The method includes the following steps: A first member of a disposable article is provided. An  
10 electromagnetic field responsive member is provided on the first member. A second member of the disposable article is provided juxtaposed at least a portion of the first member to form a laminate including the first member and the second member. An electromagnetic field is applied across at least a portion of the laminate to heat the electromagnetic field responsive member to join at least a portion of the first member and  
15 at least a portion of the second member.

In a particularly preferred embodiment to manufacture a flangeless seam, the method includes the following steps: A first member of a disposable article is provided. The first member is folded about the electromagnetic field responsive member providing opposing first proximal and first distal portions of the first member, the electromagnetic  
20 field responsive member being disposed at least partially between the opposing first proximal and first distal portions. A second member of the disposable article is provided in a folded configuration juxtaposed at least a portion of the first member to form a laminate including the first member and the second member. An electromagnetic field is applied across at least a portion of the laminate to heat the electromagnetic field  
25 responsive member to join at least a portion of the first member and at least a portion of the second member. The resulting seam can be opened to provide the article with a flangeless seam.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

While the specification concludes with claims particularly pointing out and distinctly claiming the subject matter which is regarded as forming the present invention, it is believed that the invention will be better understood from the following description which is taken in conjunction with the accompanying drawings in which like designations  
5 are used to designate substantially identical elements, and in which:

Figure 1 is a perspective view of one embodiment of a disposal training pant in a typical in-use configuration as it would be applied to a wearer comprising a seam formed by one embodiment of the present invention;

10 Figure 2 is a plan view of the chassis of the training pant of Figure 1 having portions cut away to reveal the underlying structure, the surface which will form the outer surface of the disposable article facing away from the viewer;

Figure 3 is an enlarged cross-sectional view of one embodiment of a seam made by one embodiment of the present invention in the configuration in which portions of the  
15 seam are joined together;

Figure 3A is an enlarged cross-sectional view of the seam area shown in Figure 3 in an open configuration;

Figure 4 is an enlarged cross-sectional view of one embodiment of a seam made by one embodiment of the present invention in the configuration in which portions of the  
20 seam are joined together;

Figures 5A-G show a schematic view of a portion of one preferred embodiment of the method of the present invention;

Figure 6 is an enlarged cross-sectional view of one embodiment of a seam made by one embodiment of the present invention in the configuration in which portions of the  
25 seam are joined together;

Figure 7 is an enlarged cross-sectional view of the seam area shown in Figure 3 in an open configuration;

Figure 8 an enlarged cross-sectional view of one embodiment of a seam made by one embodiment of the present invention in the configuration in which portions of the  
30 seam are joined together; and

Figure 9 is a cross-sectional view of one embodiment of the apparatus used to make the seam of the present invention.

### **DETAILED DESCRIPTION OF THE INVENTION**

5 Referring to the drawings, it will be noted that Figure 1 is a perspective view of a unitary disposable article. A unitary disposable article is one which is intended to be discarded after it is used (i.e., it is generally not intended to be laundered or otherwise restored or reused). The disposable article may be provided with an absorbent assembly which is placed in close proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. A preferred embodiment of the disposable  
10 article of the present invention, disposable training pants 20, is shown in Figure 1.

The training pants 20 of Figure 1, preferably comprise a chassis 14, an absorbent assembly 22, and at least one seam. In a particularly preferred embodiment, the seam may comprise a flangeless seam 10. (As used herein the term "flangeless seam" refers to a  
15 seam which extends from the disposable training pants 20 about 1/8 inch or less. Preferably the flangeless seam 10 will extend from the article about 1/16 inch or less, and more preferably 1/32 inch or less.) The chassis 14 of the present invention preferably has a symmetric, modified hour-glass shape. The chassis 14 preferably comprises a front portion 56, a rear portion 58, a crotch portion 57. The chassis 14 preferably further  
20 comprises elasticized leg cuffs 32, an elasticized waistband 34, elasticized side panels 30 and longitudinal side regions 88. The longitudinal side regions 88 preferably comprise a polymeric material to facilitate the seaming process which is described in greater detail below.

The training pants 20 preferably further comprises an absorbent assembly 22  
25 preferably secured to the chassis 14 by any means known in the art. The absorbent assembly preferably comprises a liquid permeable topsheet 24, a liquid impervious backsheet 26 and an absorbent core 28 sandwiched between the topsheet 24 and the backsheet 26.

Figure 2 is a partially cut-away perspective view of the disposable article 20 of  
30 Figure 1, prior to the front portion 56 and the rear portion 58 of the chassis 14 being

joined together. (As used herein, the term "joined" encompasses configurations whereby an element is directly secured to the other element by affixing the element directly to the other element, and configurations whereby the element is indirectly secured to the other element by affixing the element to intermediate member(s) which in turn are affixed to the other element.) As shown in Figure 2, a preferred embodiment of the chassis 14 will comprise an outer cover 48, an inner cover 46, elastic side panel members 90, elastic waistband members 76, and elastic strands 75 secured between the inner cover 46 and the outer covers 48.

The inner cover 46 is that portion of the chassis 14 which will form the interior of the disposable training pants 20. The outer cover 48 is that portion of the chassis 14 which will form the exterior of the disposable training pants 20, i.e. face away from the wearer. The outer cover 48 is preferably liquid impervious or hydrophobic, yet breathable or pervious to vapors. The inner cover 46 and the outer cover 48 are preferably compliant, soft feeling, and non-irritating to the wearer's skin. A suitable inner or outer cover may be manufactured from a wide range of materials, such as plastic films including microporous films; woven or non-woven webs of natural fibers (e.g. wood or cotton fibers), synthetic fibers (e.g. polyester or polypropylene fibers), a combination of natural and synthetic fibers, or laminates of any of these or other known materials. Preferably, the inner and outer covers 46 and 48 comprise a significant amount of thermoplastic fibers, typically 50% or more, preferably 100%. Material suitable for use as an inner or outer cover is Series 6700 Nonwoven manufactured by PGI Nonwovens of Landisville, NJ.

In a preferred embodiment of the present invention, at least a portion of the inner and outer covers 46, 48 will be subjected to mechanical stretching in order to provide a "zero strain" stretch laminate that forms the elasticized side panels 30. Thus, the inner and outer covers 46, 48 are preferably elongatable, most preferably drawable, but not necessarily elastomeric, so that the inner and outer covers 46, 48 will, upon mechanical stretching, be at least to a degree permanently elongated such that they will not fully return to their original undistorted configuration. In preferred embodiments, the inner and outer covers 46, 48 can be subjected to mechanical stretching without undue rupturing or

tearing. Thus, it is preferred that the inner and outer covers 46, have a low cross-machine direction (lateral direction) yield strength.

Suitable "zero strain" stretch laminates and methods for producing them are disclosed in U.S. Patent No. 5,330,458 entitled "Absorbent Article With Elastic Feature Having A Portion Mechanically Prestrained" issued to Buell et al., on July 19, 1994; U.S. Patent 2,075,189 issued to Galligan on March 30, 1937; U.S. Patent 3,025,199 issued to Harwood on March 13, 1962; U.S. Patents 4,107,364 and 4,209,563 issued to Sisson on August 15, 1978 and June 24, 1980, respectively; U.S. Patent 4,834,741 issued to Sabee on May 30, 1989; and U.S. Patent 5,151,092 issued to Buell et al., on September 29, 1992. All of the above referenced patents are hereby incorporated by reference.

Alternatively, the inner and outer covers 46, 48 or portions thereof may comprise a structural elastic-like film (SELF) web. A structural elastic-like film web is an extensible material that exhibits an elastic-like behavior in the direction of elongation without the use of added elastic materials. SELF webs suitable for the present invention are more completely described in the co-pending, commonly assigned U.S. Patent No. 5,554,145, in the name of Donald C. Roe, et al., entitled "Absorbent Article with Multiple Zone Structural Elastic-Like Film Web Extensible Waist Feature" issued September 10, 1996; and U.S. Patent No. 5,518,801, in the names of Chappell, et al, entitled "Web Materials Exhibiting Elastic-Like Behavior" issued May 21, 1996, both of which are incorporated herein by reference.

A more detailed description of a suitable training pant, as well as preferred components and alternative embodiments, in which the method and seams of the present invention may be used can be found in U.S. Patent 5,236,430 entitled "Disposable Training Pant Having Fusion-Slit Side Seams", issued to Russell P. Bridges on August 17, 1993, and U.S. Patent 5,246,433 entitled "Elasticized Disposable Training Pant and Method of Making the Same", issued to Hasse et al. on September 21, 1993. The specification, claims and drawings of each of these patents are hereby incorporated by reference herein.



### Method of Making a Flangeless Seam

One preferred method for making flangeless seams especially useful in disposable articles, such as training pants, incontinence articles and the like is shown schematically in Figures 5A-5G. The step depicted in Figure 5A shows providing a web 400 having longitudinal side edges 410 that will be processed into disposable article 20 having first members 200 and second members 202 to be joined. Figure 5B shows electromagnetic field responsive member 205 provided juxtaposed at least a portion of each longitudinal side edge 410. Figure 5C shows the longitudinal side edges 410 being folded over the web 400. A second electromagnetic field responsive member 205, as shown in Figure 5C, may be provided adjacent the folded over longitudinal side edges 410. Figure 5D shows the chassis 14 of the disposable article 20 with the side notches 10 removed.

First member 200 is preferably folded about the electromagnetic field responsive member 205 providing opposing first proximal and first distal portions 210 and 212. The electromagnetic field responsive member 205 is preferably disposed at least partially between the opposing first proximal and first distal portions 210 and 212. (The "proximal portion" is that portion of the first or second member which is joined, or will be joined, either directly or indirectly, to a portion of the disposable article 20, preferably other than the second member 202. The "distal portion" is that portion of the first member 200 or second member 202 extending from the proximal portion to the free end 214.) Figure 5E shows the second member 202 of the disposable article 20 being provided juxtaposed at least a portion of the first member 200 forming a laminate 220 of the first member 200, the second member 202 and the electromagnetic field responsive member(s) 205. (A more detailed drawing of the laminate 220 is shown in Figure 3.) Other embodiments, however, are contemplated wherein the electromagnetic field responsive member 205 is disposed in a location other than between the first proximal and distal portion. For example, the electromagnetic field responsive member 205 may be disposed between the proximal portion of the first member 200 and the distal portion of the second member 202, between the distal portion of the first member 200 and the proximal portion of the second member 202 or any other locations suitable for joining the first and second members.

Figure 5F shows the diaper 20 in a configuration for seaming laminate 220. An electromagnetic field is provided across the seam area 250, heating the electromagnetic field responsive member(s) 205 and joining at least a portion of the first member 200 and the second member 202 to form seam 10. The duration of the electromagnetic field and/or the electromagnetic field responsive member(s) 205 may be varied such that opposing second proximal and second distal portions 216 and 218 remain unjoined to each other. Alternatively, as shown in Figure 6-8, a barrier member 300 may be used to prevent the joining of the opposing second proximal and second distal portions 216 and 218. Thus, the seam 10 may be opened from the configuration in which it is sealed (one embodiment is shown in Figure 3) to a flangeless configuration wherein opposing second proximal and second distal portions 216 and 218 of the second member 202 are in a relatively planar configuration with regard to one another. (An example of the seam in a planar configuration is shown in Figure 5G and in more detail in Figure 3A).

It should be noted that the scope of the present invention is not intended to be limited by the particular order in which the steps of the method are described. For example, although the side notches 10 are shown to be removed first in Figure 5D, it is contemplated that the side notches 10 may be removed before, after or during any other step of the process. Further, the method of the present invention can be performed on-line in conjunction with, or at separate time and/or in a location remote from, the manufacture of the absorbent article which comprise the seams formed by the present method. If the process is performed on-line in conjunction with the manufacture of the absorbent article, the seams may be formed before, after or at the same time that the first and second members 200 and 202 are joined with the chassis 14 of the disposable article 20. Also, it should be understood that the exact size and shape of any member comprised in the disposable article 20, as well as the materials comprised in the members may vary depending on the desired characteristics of the disposable article 20.

As described above, the method for manufacturing a flangeless seam preferably includes providing a first member 200 and a second member 202. The chassis 14 preferably comprises at least one longitudinal side region 88 having a first member 200 and a second member 202. As shown in Figure 2, the chassis 14 more preferably

comprises a pair of opposing longitudinal side regions 88, each of which comprise a first member 200 and a second member 202. (Although the first members 200 are shown in Figure 2 to be disposed in the front portion 56 and the second members 202 are shown to be disposed in the rear portion 58, embodiments are contemplated wherein the first members 200 are disposed in the rear portion 58 and the second members 202 are disposed in the front portion 56.)

The first and second members 200 and 202 may be separate members joined to the longitudinal side regions 88 or may be integral with the longitudinal side regions 88. (As used herein, the term "integral" refers to elements that are joined to one another in such a way that the elements are neither divided nor discontinuous with the other elements.) If the first and second members 200 and 202 are joined with the chassis 14, any suitable means for joining known in the art may be used. In a preferred embodiment, the first and second members 200 and 202 are extensions of the topsheet 24, the backsheet 26, both the topsheet 24 and the backsheet 26 or any other element or elements of the disposable article that may be suitable for joining to form a seam 10.

The first member 200 and the second member 202 may comprise any material known in the art that is suitable for use in disposable articles such as training pants 20 which may be joined together to form seam 10. Examples of suitable materials include, but are not limited to polymeric films, woven webs, nonwoven webs or combinations of these or other suitable materials known in the art. Examples of preferred materials include the carded nonwoven DPN290 available from Fiberweb, Clopay 1401 polyethylene film available from the Clopay Corporation of Cincinnati, OH, and FS2 or Plus polyethylene films available from Tredegar Film Products, Inc., of Terre Haute IN.

The method of the present invention further comprises the step of providing one or more electromagnetic field responsive members 205, as shown in Figures 5B and 5C. The electromagnetic field responsive member(s) 205 heat up when an electromagnetic field is provided, thereby melting and joining at least a portion of the first member 200 and the second member 202. (It is believed that a conductive electromagnetic field responsive member 205 becomes heated because of Joule heating or the decay of a current induced in the electromagnetic field responsive member 205 by the external magnetic

field. It is also believed that other electromagnetic field responsive member(s) 205 may become heated by high frequency oscillation of dipole moments and/or ions that create heat through friction. However, Applicants do not wish to be limited to this theory.) Alternatively, the electromagnetic field responsive member 205 may include an added substance or may heat up a substance added to or coated on either the first member 200, the second member 202 or the electromagnetic field responsive member 205. In such cases, the added material or member becomes active adhesively, cohesively or the like to join the first member 200 and the second member 202 either alone or in combination with the bond formed by the electromagnetic field responsive member 205 melting and joining at least a portion of the first member 200 and the second member 202. Examples of suitable substances to be added to the seam area are hot melt adhesives which can be obtained from Ato Findley Adhesives, Inc. of Wauwatosa, WI as H-2120 or H-2379.

The electromagnetic field responsive member(s) 205 may include any conductive material or materials, a material or materials such as a polymer having both a dipole moment or an ionic charge that responds to an electromagnetic field and a sufficient dielectric loss so that the material will dissipate heat in response to the electromagnetic field, or a combination of these materials. The electromagnetic responsive member(s) 205 may take on any shape, size or configuration suitable for the particular seam to be formed. Further, the electromagnetic field responsive member(s) 205 may be separate elements joined to the first or second member(s) 200 and 202 or a separate member not joined to the first or second members 200 and 202, but merely provided in a position to react to the electromagnetic field while the seam 10 is being formed. Alternatively, the electromagnetic field responsive member(s) 205 may comprise an element or material that is unitary or integrated with at least a portion of the first member 200 or second member 202, such as a material coextruded with the first member 200 or the second member 202, or portion of the first member 200 or second member 202 that has been coated or impregnated to act as an electromagnetic field responsive member.

Examples of suitable conductive electromagnetic field responsive members 205 include, but are not limited to ferro-magnetic materials, metallic foils and screens such as aluminum, copper and nickel, metallic powders such as bismuth powder and any

conductive materials known in the art. (As used herein the term "conductive" refers to materials which increase in temperature when in the presence of eddy currents generated by an alternating current flowing through an electromagnetic coil.) The conductive electromagnetic field responsive members 205 may also be in the form of a composite material such as a solution, adhesive, lotion, film, web, etc. including the conductive material. Some exemplary conductive materials are available from the Ashland Chemical Company under the trade name EMAWELD. Generally, the composition of the electromagnetic field responsive members 205 will be limited only by the particular electromagnetic frequency to be used and intensity of heat which is needed to properly join the first member 200 and the second member 202. The conductive material may also be magnetic which may increase the efficiency of the heating due to an hysteric loss of the material when it is placed in an electromagnetic field.

Another example of electromagnetic field responsive members 205 that are electromagnetic ("EM") responsive and may be used in the present invention includes a material or materials that have a dipole moment or an ionic charge in which a dipole moment has disassociated and that have a sufficient dielectric loss so that the material will dissipate heat in response to the electromagnetic field. For example, a suitable material may include one or more EM responsive polymers, polymer blends or additives such as inorganic salts. Further, the response of particular EM responsive materials such as polymers, polymer blends, or additives may be enhanced chemically or physically. The EM response of a material may be enhanced chemically by modifying the chemical structure by incorporating therein functional groups that are EM responsive. The EM response of a material may also be enhanced by blending EM responsive polymers, chemicals or additives, e.g., blending a polar carrier into an EM responsive polymer. Examples of materials that may be used in the present invention are disclosed in PCT Application No. WO 86/07034A1 entitled "RF-Sealable Packaging Containers" that published on December 4, 1986; United States Patent No. 5,645,904 entitled "Method and Compositions that Render Materials RF Responsive" issued on July 8, 1997; United States Patent No. 5,840,146 entitled "Method and Compositions that Render Materials RF Responsive" issued on November 24, 1998; and PCT Published Application No. WO

99/47621A1 entitled "RF-Sealable Packaging Containers" that published on December 4, 1986, each of which is hereby incorporated by reference.

The choice of various polymers or conductive materials for use as the electromagnetic field responsive member 205 may be driven by the frequency ranges that are desired to join the materials of the present invention. For example, radio frequencies and/or microwave frequencies may be used to activate the electromagnetic field responsive member 205.

The means by which the electromagnetic field responsive member 205 may be provided, as well the timing and location for providing the electromagnetic field responsive member 205 will be dependent on the exact electromagnetic field responsive member 205 chosen. However, once a particular electromagnetic field responsive member 205 has been chosen, the electromagnetic field responsive member 205 may be provided by any suitable means known in the art. For instance, if an electromagnetic field responsive member 205 comprising bismuth powder is chosen, one preferred means for providing the barrier member 205 is spraying the bismuth powder composition onto at least a portion of the first member 200. If a polymer or polymer blend electromagnetic field responsive member 205 is chosen, for example, the member 205 may be provided to the seam area of the first or second by a number of standard hot melt or liquid dispersion technologies such as spiral, bead, curtain coat, meltblown, uniform fiber deposition, screen coating, gravure and other similar application techniques. If the electromagnetic field responsive member 205 is a metallic foil, the foil may be cut and slipped into place in the seam region 250 at any point in the process before the seam is made. The electromagnetic field responsive member 205 may be removed from the seam area 250 once the seam 10 is made or may remain as part of the finished seam 10.

In one preferred embodiment, as shown in Figure 3, once the electromagnetic field responsive member 205 is provided, the first member 200 is folded about the electromagnetic field responsive member 205. (As stated above, the exact order of the steps of the process are not critical, thus, the electromagnetic field responsive member 205 may be provided before or after the first member 200 is folded.) The fold 215 preferably separates the first member 200 into two portions, a first proximal portion 210

and an opposing first distal portion 212. Preferably, the electromagnetic field responsive member 205 is disposed at least partially between the opposing first proximal and first distal portions 210 and 212, as shown in Figure 3. The length of the first proximal portion 210 and the first distal portion 212 is not critical, and either or both may comprise  
 5 any number of layers and/or folds. In fact, it is recognized that one way to increase the strength of the finished seam is to provide more material in the seam area 250. In an alternative embodiment, the first member 200 is folded about the electromagnetic field responsive member 205 and at least a portion of the second member 202, as shown in Figure 4.

10 The method of the present invention further comprises the step of providing a second member 202 having a second proximal portion 218 and a second distal portion 216. The second member 202 is preferably provided juxtaposed at least a portion of the first distal portion 210 of the first member 200 at a location wherein the opposing first proximal and first distal portions 210 and 212 have the electromagnetic field responsive  
 15 member 205 disposed between them. This forms a laminate 220 (one embodiment of which is shown in Figure 3) including the first member 200, the second member 202 and the electromagnetic field responsive member 205. (As used herein, the term "laminate" refers to any number of materials that are in a generally overlapping configuration so as to form at least two layers. The materials included in the laminate may comprise single layer  
 20 materials or laminates of similar or different materials. Further, any laminates comprised in the laminate 220 may have layers that are joined or unjoined with each other.) As shown in Figure 5C-5E, an electromagnetic field responsive member 205 may also be disposed between the first distal portion 210 of the first member 200 and the second member 202. This ensures an acceptable bond between those portions of the diaper 20,  
 25 may reduce the amount of energy needed to create the bond and may increase the seam's strength and integrity.

Once the materials comprised in the laminate 220 have been properly configured, the seam 10 is formed. The seam 10 comprises those portions of the laminate 220 that are joined together (i.e. at least a portion of the first member 200 and at least a portion of the  
 30 second member 202). To form the seam 10, an electromagnetic field is applied across at

least a portion of the laminate 220. In one preferred embodiment, the electromagnetic field is applied across the seam area 250 as shown in Figure 3. The electromagnetic field heats the electromagnetic field responsive member(s) 205 to a temperature which melts and joins at least a portion of the first member 200 and at least a portion of the second member 202. (As described above, in alternative embodiments, the electromagnetic field responsive member(s) 205 may heat a material such as a hot melt adhesive or cohesive located in the seam area 250 which acts to join at least a portion of the first member 200 and a portion of the second member 202.) Preferably, at least the first distal portion 210 of the first member 200 is joined to the first proximal portion 212 and the second distal portion 216. Preferably, at least a portion of the second proximal portion 218 remains unjoined from the second distal portion 216. Thus, a flangeless seam 10 is formed that may be "opened" to the relatively planar configuration shown in Figure 3A. (As used herein, the terms "open" or "opened" refer to pulling apart or separating predetermined portions of the laminate 220, such as the second proximal portion 218 and the second distal portion 216, once the laminate has been seamed so as to form a relatively planar configuration, an example of which is shown in Figure 3A.)

The electromagnetic field used to heat the electromagnetic field responsive member 205 may be provided by any means known in the art. In one embodiment, as shown in Figure 9, the electromagnetic field 510 is provided by an induction coil 500. (An exemplary induction coil is the Nova Series induction heating power supply available from Ameritherm, Inc. of Scottsville, NY. Specifically, a NOVA3, 3Kw power supply (220 volts, 60Hz, 3 phase) powering a small pancake style induction coil operating at 393 Khz has been found to be suitable.) The induction coil 500 is placed in the proximity of the seaming area 250 such that the electromagnetic field 510 produced by the coil radiates across the electromagnetic field responsive members 205. While not wishing to be limited by theory, it is believed that the primary mechanism for heating the electromagnetic field responsive member 205 is Joule heating resulting from the decay of a current which is induced in the electromagnetic field responsive member 205 by the external electromagnetic field 510. A secondary heating mechanism is found when magnetic electromagnetic field responsive members 205 are used. The additional heating



occurs due to an hysteric loss in the material at temperatures below the Curie temperature of the material. In either case, the electromagnetic field responsive member 205 is heated to a temperature at which the electromagnetic field responsive member 205 transfers enough heat energy to the surrounding materials to melt or activate the materials, thus, joining them.

The method of the present invention may also include the step of applying a secondary joining means across the seam area 250. Such secondary joining means may be used to increase the seam strength or to otherwise modify the characteristics of the seam 10. The joining means may comprise any means suitable for joining the materials comprised in the first and second members 200 and 202. However, a joining means must be chosen that will join the desired portion or portions of the first member 200 with the desired portion or portions of the second member 202 while not joining to those portions of the first member 200 and the second member 202 which have been designated to remain unjoined. Suitable joining means include, but are not limited to, adhesives, pressure bonding means, heat bonding means, heat and pressure bonding means, ultrasound bonding means, infrared bonding means or any other joining means or combination of joining means known in the art.

Examples of suitable adhesive joining means include, but are not limited to, hot melt adhesives such as Ato Findley H-2120, or Ato Findley H-2379 available from Ato Findley Adhesives Corporation of Wauwatosa, WI. Such adhesive may be applied with slot, spiral or control spray coating equipment such as those available from Nordson Corporation of Norcross, GA. Examples of methods and apparatus for treating materials with ultrasonic energy are disclosed in U.S. Patent 3,657,033 issued to Sager on April 18, 1972 entitled "Method and Apparatus for Continuous Cutting and Joining of Thermoplastic Sheet Material"; U.S. Patent 4,400,227 issued to Riemersma on August 23, 1983; U.S. Patent 4,430,148 issued to Schaefer on February 7, 1984; U.S. Patent 4,560,427 issued to Flood on December 24, 1985 entitled "Ultrasonic Seal and Cut Method and Apparatus"; and U.S. Patent 4,693,771 issued to Payet, et al. on September 15, 1987 entitled "Woven Textile Fabric Having and Ultrasonically Cut and Sealed Edge and Apparatus and Process for Producing Same"; all of which references are incorporated

herein by reference. U.S. Patent 5,236,430 entitled "Disposable Training Pant Having Fusion-Slit Side Seams", issued to Russell Bridges on August 17, 1993; and U.S. Patent 3,457,132 issued to Tuma, et al. on July 22, 1969 entitled "Apparatus for Severing and Sealing Webs of Heat Sealable Packaging Material in a Single Operation", disclose  
 5 preferred methods and apparatus for severing and sealing webs using thermal energy and mechanical energy including ultrasound. These references are also incorporated herein by reference.

The method of the present invention may also include the step of providing a barrier member 300, as shown in Figures 6-8. The barrier member 300 is provided to  
 10 ensure that when the seam 10 is formed, joining the first member 200 and the second member 202, at least a portion of the first member 200 is not joined with at least a portion of the second member 202. The barrier member 300 may take on any shape, size or configuration suitable for the particular seam to be formed. The barrier member 300 may comprise a single layer or any number of layers. (The multi-layer configurations may  
 15 comprise a single barrier member folded upon itself any number of times or may comprise layers of unjoined material) The barrier member 300 may comprise any known material or means that will prevent the first member 200 and the second member 202 from becoming fully joined when the seam is formed. Further, the barrier member 300 may be a separate element joined to the first member or a separate member not joined to the first  
 20 member 200, but merely provided in a position to act as a barrier while the seam is being formed. Alternatively, the barrier member 300 may comprise an element or material that is unitary or integrated with at least a portion of the first member 200, such as a material coextruded with the first member 200, or portion of the first member that has been chemically, mechanically or otherwise manipulated to act as a barrier to the joining means  
 25 used to form the seam 10. In one embodiment, the barrier member 300 may comprise the electromagnetic field responsive member 205. For example, the electromagnetic field responsive member may provide heat to form the seam 10 but may not become part of the seam 10. In such cases, the electromagnetic field responsive member may be removed when the seam is opened to a flangeless configuration.

Examples of suitable barrier members include, but are not limited to KEVLAR, NYLON, polypropylene films, polyethylene films, scrims, woven materials or laminates of any these or any other suitable materials known in the art. Other suitable barrier member materials may comprise silicone, talc, clay, TEFLON, lotions or any other  
5 suitable release means that will prevent predetermined portions of the barrier member 205 from becoming joined when the joining means 300 is applied. Yet other suitable barrier members comprise foams; laminates of films, foams and/or nonwoven webs; adhesives; coated or non-coated paper products such as paper towels or tissue; cotton and cotton-flocked films. Generally, the composition of the barrier member 205 will be limited only  
10 by the particular joining means 300 which will be used and the strength characteristics necessary to provide an acceptable seam.

While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention.  
15 It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

WHAT IS CLAIMED IS:

1. A method of making a flangeless seam by joining two members of a disposable article, the method comprising the steps of:  
 providing a first member of the disposable article;  
 folding the first member of the disposable article providing opposing first proximal and first distal portions of the first member;  
 providing an electromagnetic field responsive member adjacent at least a portion of the member;  
 providing a second member of the disposable article juxtaposed at least a portion of the first member to form a laminate including the first member, the second member and the electromagnetic field responsive member; and  
 applying an electromagnetic field across at least a portion of the laminate to heat the electromagnetic field responsive member to a temperature which joins at least a portion of the first member and at least a portion of the second member.
2. The method of Claim 1 wherein the electromagnetic field responsive member is integral with at least a portion of the second member.
3. The method of Claim 1 wherein the first member is folded about both the electromagnetic field responsive member and at least a portion of the second member.
4. A method of making a flangeless seam by joining two members of a disposable article, the method comprising the steps of:  
 providing a first member of the disposable article;  
 providing an electromagnetic field responsive member adjacent at least a portion of the first member;  
 folding the first member of the disposable article about the electromagnetic field responsive member providing opposing first proximal and first distal portions of the first member, the electromagnetic field responsive member being disposed at least partially between the opposing first proximal and first distal portions;

providing a second member of the disposable article in a folded configuration juxtaposed at least a portion of the first member to form a laminate including the first member and the second member; and

applying an electromagnetic field across at least a portion of the laminate to heat the electromagnetic field responsive member to a temperature which joins at least a portion of the first member and at least a portion of the second member.

5. The method of Claim 4 further comprising the step of pulling apart the first member and the second member to form a flangeless seam.

6. The method of Claim 4 further comprising the step of removing the electromagnetic field responsive member after the first member and the second member have been joined.

7. The method of Claim 4 wherein the step of folding the first member includes folding the first member before the electromagnetic field responsive member is interposed between the opposing first proximal and first distal portions.

8. The method of Claim 4 wherein the first member includes more than one fold.

9. The method of Claim 4 wherein the electromagnetic field responsive member is integral with at least a portion of the first member.

10. The method of Claim 4 wherein the first member is folded about both the electromagnetic field responsive member and at least a portion of the second member.

11. The method of Claim 4 wherein the electromagnetic field responsive member includes a material selected from the following group: metallic foil, metallic screen or metallic powder.

12. A method of making a flangeless seam by joining two members of a disposable article, the method comprising the steps of:  
 providing a first member of the disposable article;  
 5 folding the first member of the disposable article providing opposing first proximal and first distal portions of the first member;  
 providing a heat activatable adhesive adjacent at least a portion of the first distal portion;  
 providing an electromagnetic field responsive member adjacent at least a portion  
 10 of the first distal portion;  
 providing a second member of the disposable article juxtaposed at least a portion of the first member to form a laminate including the first member, the second member, the heat activatable adhesive and the electromagnetic field responsive member; and  
 15 applying an electromagnetic field across at least a portion of the laminate to heat the electromagnetic field responsive member to a temperature which activates the heat activatable adhesive such that the adhesive joins at least a portion of the first member and at least a portion of the second member.
- 20 13. A method of making a flangeless seam by joining two members of a disposable article, the method comprising the steps of:  
 providing a first member of the disposable article;  
 providing an electromagnetic field responsive member adjacent at least a portion of the first member;  
 25 folding the first member of the disposable article about the electromagnetic field responsive member providing opposing first proximal and first distal portions of the first member, the electromagnetic field responsive member being disposed at least partially between the opposing first proximal and first distal portions;  
 providing a second member of the disposable article in a folded configuration  
 30 having a second proximal portion and a second distal portion, the second distal

portion being juxtaposed at least a portion of the first member to form a laminate including the first member, the second member and the electromagnetic field responsive member;

providing an electromagnetic field across at least a portion of the laminate to heat the electromagnetic field responsive member to a temperature which joins at least a portion of the first distal portion, the second distal portion and the second proximal portion, the electromagnetic field responsive member also preventing the joining of the first proximal portion with the first distal portion;

removing the conductive means; and

pulling apart the first proximal portion and the first distal portion to form a flangeless seam.

14. The method of Claim 13 further including providing a secondary joining means across at least a portion of the laminate.

15. The method of Claim 14 wherein the secondary joining means includes an adhesive.

16. The method of Claim 14 wherein the barrier member prevents the secondary joining means from joining the first proximal portion with the first distal portion.

17. A method of making a flangeless seam by joining two members of a disposable article, the method comprising the steps of:

providing a first member of the disposable article;

providing an electromagnetic field responsive member adjacent at least a portion of the first member;

folding the first member of the disposable article about the electromagnetic field responsive member providing opposing first proximal and first distal portions of the first member, the barrier member being disposed at least partially between the opposing first proximal and first distal portions;

providing a second member of the disposable article in a folded configuration defining opposing second proximal and second distal portions, at least a portion of the second distal portion being juxtaposed at least a portion of the first member to form a laminate including the first member, the second member and the electromagnetic field responsive member;

providing a barrier member between the second proximal portion and the second distal portion;

providing an electromagnetic field means across at least a portion of the laminate to heat the electromagnetic field responsive member to a temperature which joins at least a portion of the first member and the second member, the electromagnetic field responsive member preventing the joining means from joining the second proximal portion with the second distal portion;

removing the barrier member; and

pulling apart the second proximal portion and the second distal portion to form a flangeless seam.

18. The method of Claim 17 further including providing a secondary joining means across at least a portion of the laminate.

19. The method of Claim 18 wherein the secondary joining means includes an adhesive.

20. The method of Claim 17 wherein the barrier member prevents the secondary joining means from joining the first proximal portion with the first distal portion.



METHOD OF MAKING A FLANGELESS SEAM  
FOR USE IN DISPOSABLE ARTICLES

5

**ABSTRACT**

A method of making a flangeless seam for a disposable article including the following steps: A first member of the disposable article is provided. An electromagnetic field responsive member is provided on the first member. The first member is folded about the electromagnetic field responsive member providing opposing first proximal and first distal portions of the first member, the electromagnetic field responsive member being disposed at least partially between the opposing first proximal and first distal portions. A second member of the disposable article is provided in a folded configuration juxtaposed at least a portion of the first member to form a laminate including the first member and the second member. An electromagnetic field is applied across at least a portion of the laminate to heat the electromagnetic field responsive member to a temperature which joins at least a portion of the first member and at least a portion of the second member. The resulting seam can be opened to provide the article with a flangeless seam.

[illegible]

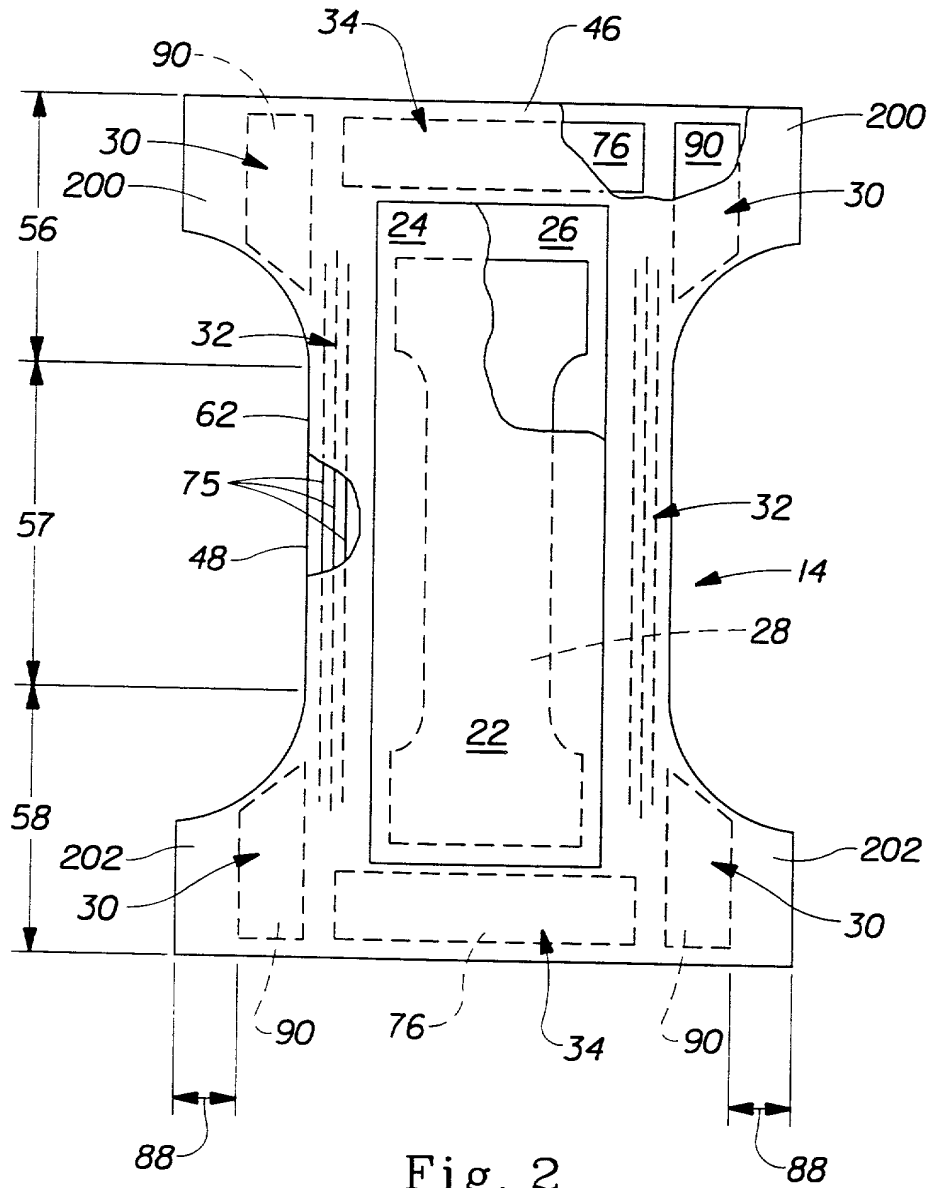


Fig. 2

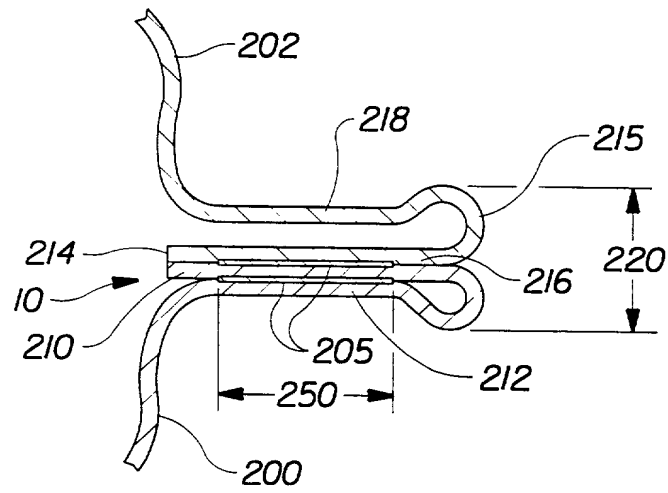


Fig. 3

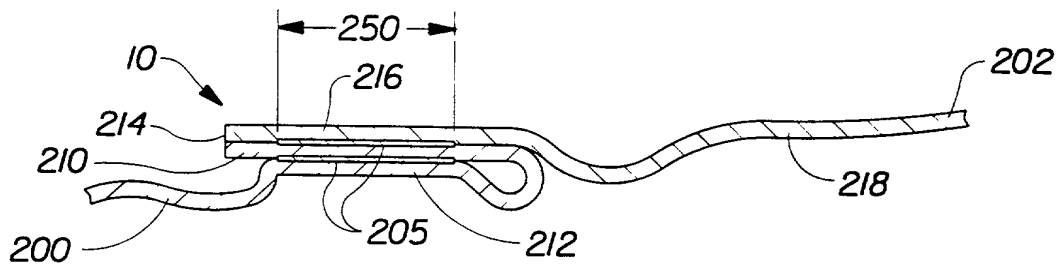


Fig. 3A

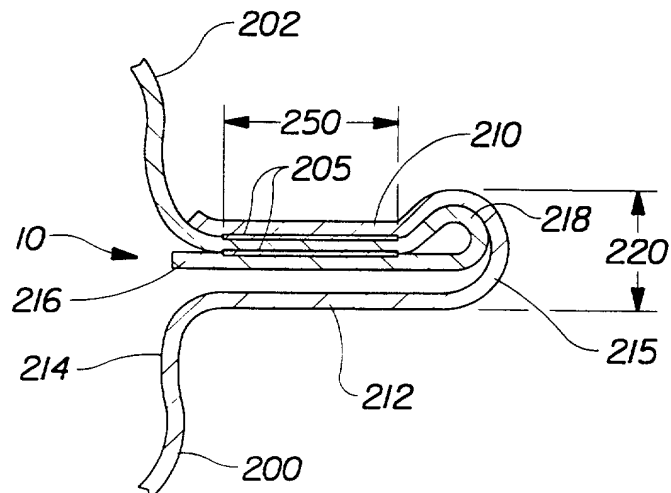


Fig. 4

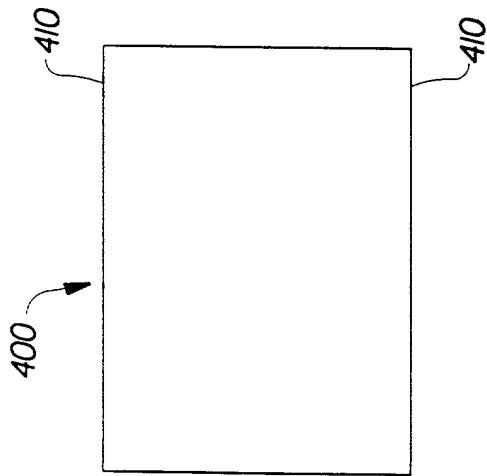


Fig. 5A

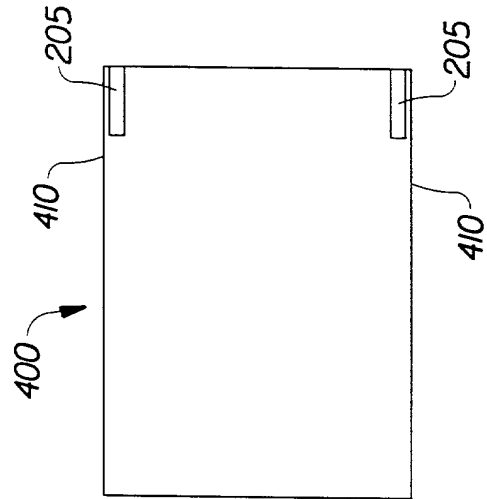


Fig. 5B

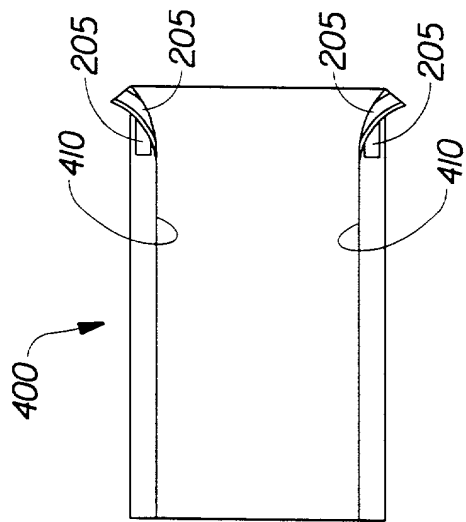


Fig. 5C

4/6

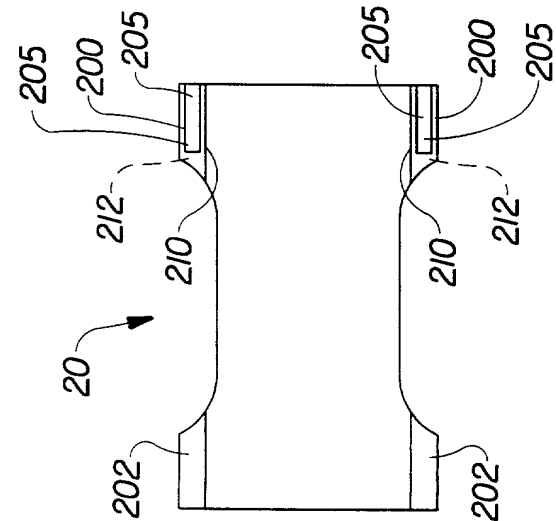


Fig. 5D

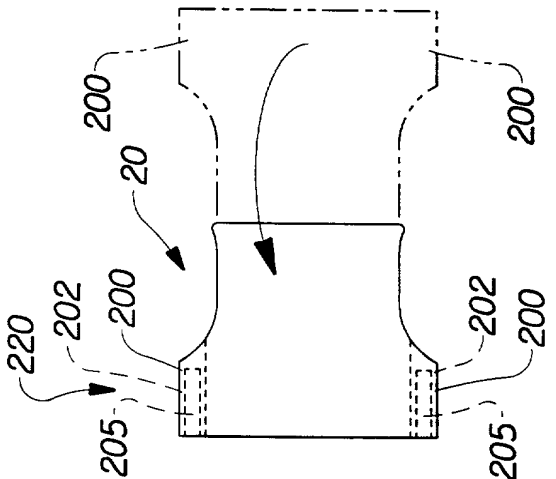


Fig. 5E

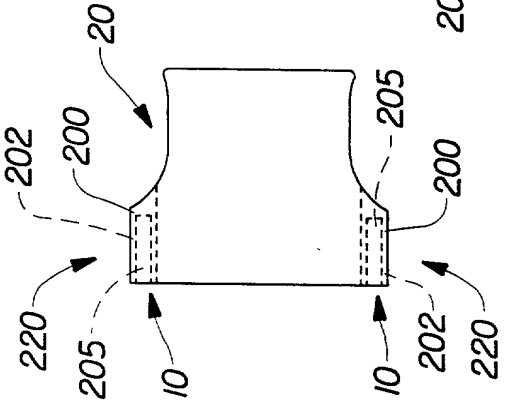


Fig. 5F

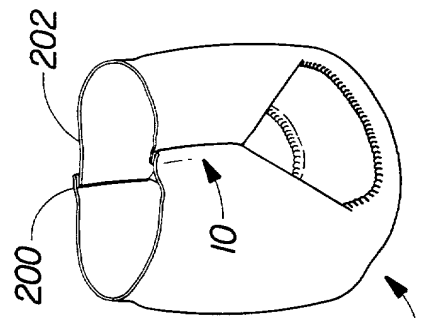


Fig. 5G

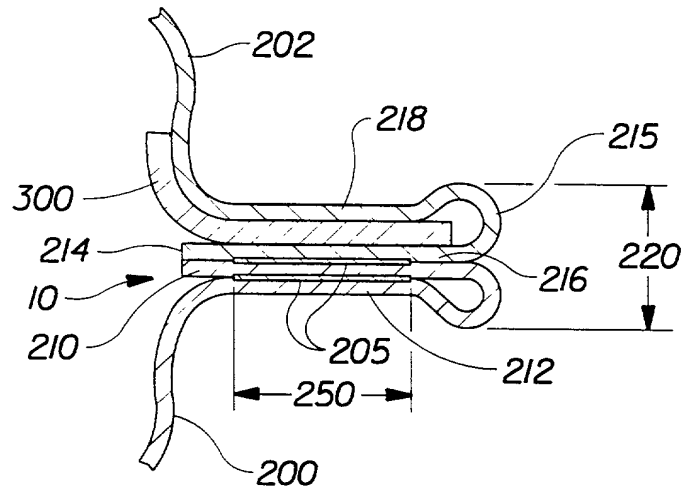


Fig. 6

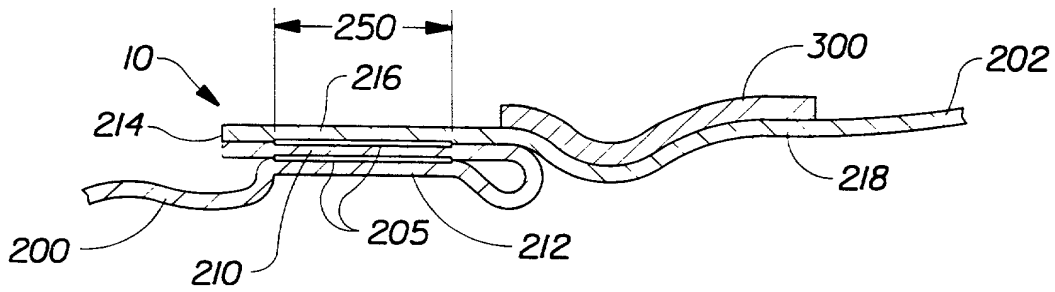


Fig. 7

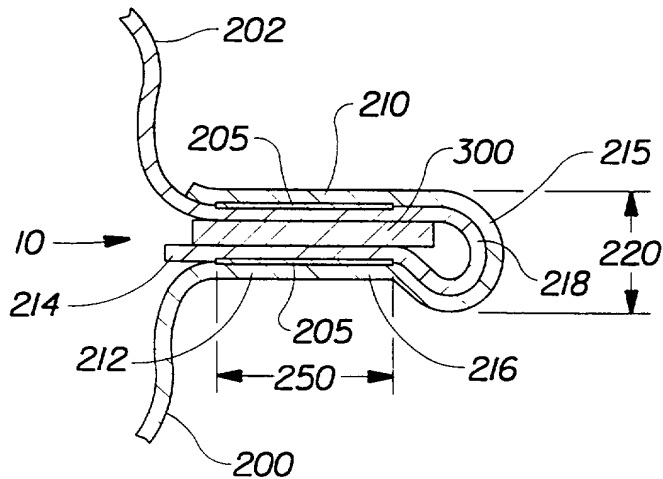


Fig. 8

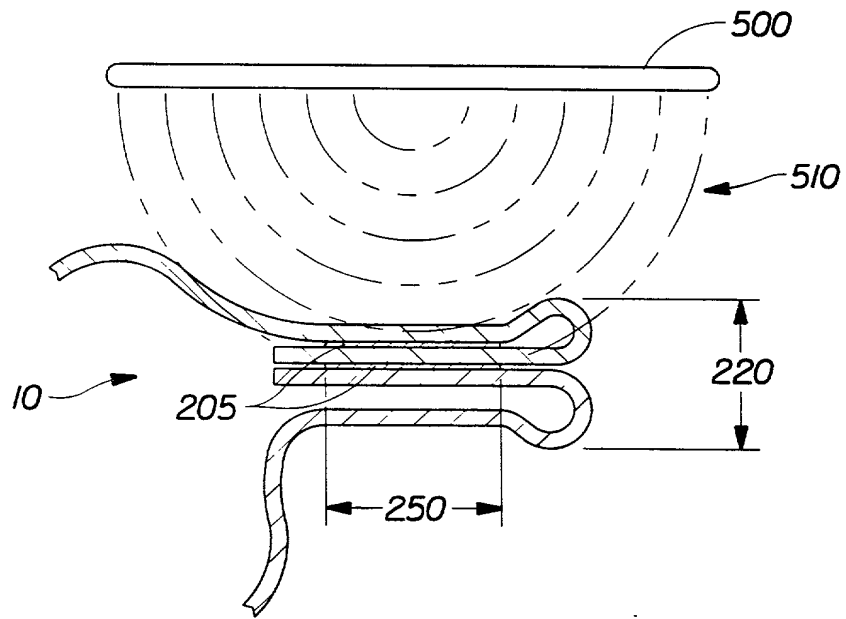


Fig. 9

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD FOR MAKING A SEAM FOR USE IN DISPOSABLE ARTICLES** the specification of which

(check ☒ [X] is attached hereto.  
one) ☐ [] was filed on \_\_\_\_\_ as  
Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in accordance with Title 37 Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or Inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>		<u>Priority Claimed</u>	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35 United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37 Code of Federal Regulations §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>09/034,763</u>	<u>3/4/98</u>	<u>Pending</u>
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby appoint the following as my attorney(s) or agent(s) with full power of substitution to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

<u>Atty Name</u>	<u>Atty Reg Number.</u>	<u>Associate Power of Attorney Attached</u>	
Thomas J. Osborne	39,796	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
David M. Weirich	38,361	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Kevin D. Hogg	31,839	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Roddy M. Bullock	37,290	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Michael S. Kolodesh	P44,846	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Steven W. Miller	31,984	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Jacobus C. Rasser	37,043	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
T. David Reed (Agent)	32,931	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Timothy B. Guffey (Agent)	41,048	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No

SEND CORRESPONDENCE TO:

Thomas J. Osborne, Jr.  
The Procter & Gamble Company (513) 626-2238  
Sharon Woods Technical Center  
11450 Grooms Road  
Cincinnati, Ohio 45242



I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first joint inventor LARRY K. JOHNSON

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence 714 Maple Ridge Road, Milford, Ohio 45150

Citizenship USA

Post Office Address The Procter & Gamble Company, Sharon Woods Technical Center  
11450 Grooms Road, Cincinnati, Ohio 45242

Full name of second joint inventor, if any STEPHEN J. LANGE

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence 440 Reily Road, Wyoming, Ohio 45215

Citizenship USA

Post Office Address The Procter & Gamble Company, Sharon Woods Technical Center  
11450 Grooms Road, Cincinnati, Ohio 45242

Full name of third joint inventor, if any JOHN J. ANGSTADT

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship USA

Post Office Address The Procter & Gamble Company, Sharon Woods Technical Center  
11450 Grooms Road, Cincinnati, Ohio 45242

Full name of fourth joint inventor, if any BRADLEY E. WALSH

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence 1954 Edgewater Drive, Cincinnati, Ohio 45240

Citizenship USA

Post Office Address The Procter & Gamble Company, Sharon Woods Technical Center  
11450 Grooms Road, Cincinnati, Ohio 45242

Full name of fifth joint inventor, if any FREDERICK W. GIBSON

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship USA

Post Office Address The Procter & Gamble Company, Sharon Woods Technical Center  
11450 Grooms Road, Cincinnati, Ohio 45242